

14 13 12 11 10 9 8 7 6 5 4 3 2 1 0



FRP radar mast (Option item)

Hard Top

High gate at starboard side

PRINCIPAL DIMENSIONS

L.O.A.	68'-10"	(20.98 M)
L.O.H.	62'-7"	(19.08 M)
L.O.D.	60'-10"	(18.54 M)
L.W.L.	60'-0"	(18.28 M)
BEAM:	18'-8"	(5.69 M)
DRAFT TO KEEL:	6'-5"	(1.95 M)
DISPLACEMENT:	143,000 Lbs	(64.86 T)
FUEL CAPACITY:	2600 US. Gal	
WATER CAPACITY:	600 US. Gal	
HOLDING CAPACITY:	230 US. Gal	
BALLAST:	3750 Lbs	
POWER:	John Deere 6125afm75 526bhp@2100 rpm	
SPEED (approx.)	TOP: 12.0 Knots	
	CRUISING: 9.0 Knots	

Keypower 25HP stern thruster

5'-0" DWL


Bulbous Bow

Base Line

Keypower 40HP bow thruster


Capstan at stern
Steel head telescopic davit
No BBQ

Electric Maxwell MWVC 3500 windlass (1/2" ACCO 640 150 galvan chain)

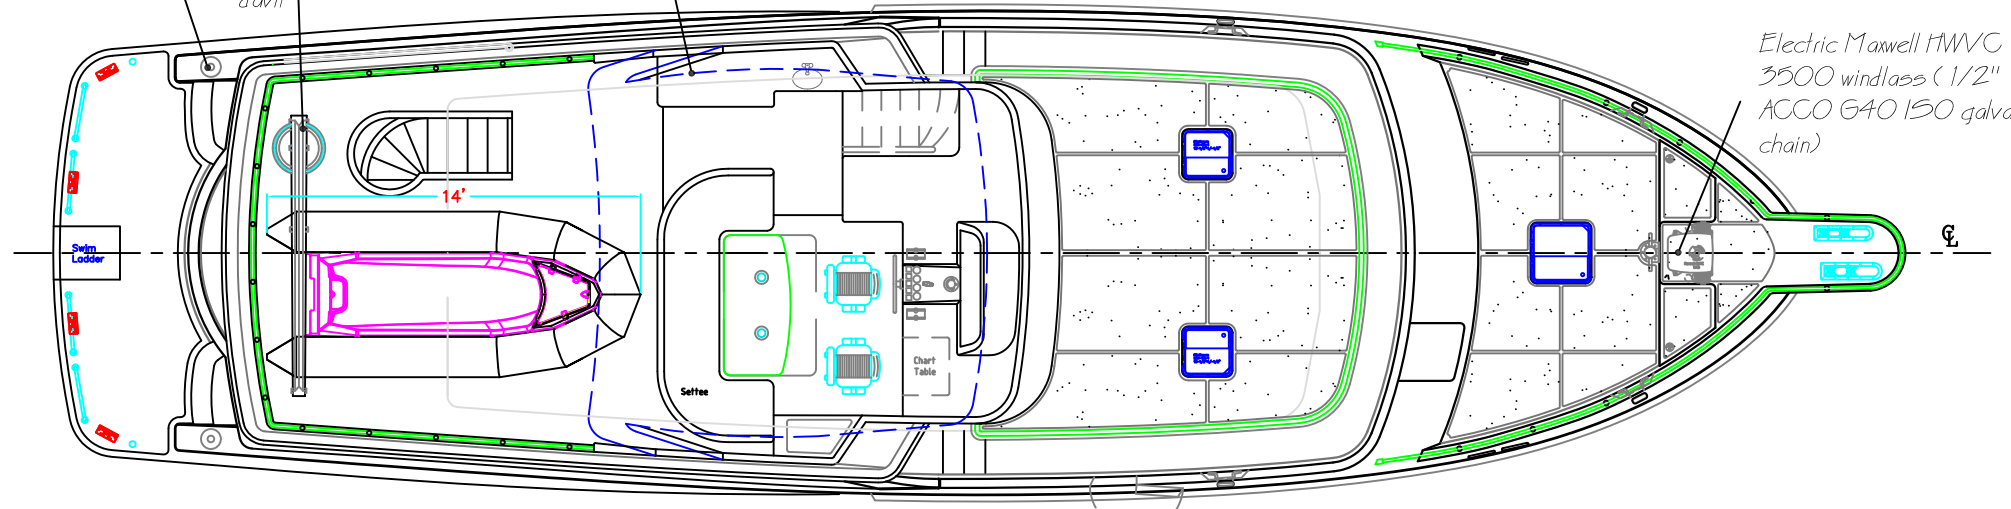

Transom gate Same as 559

椅子需提高1"。
台阶抬高1-1/2"。

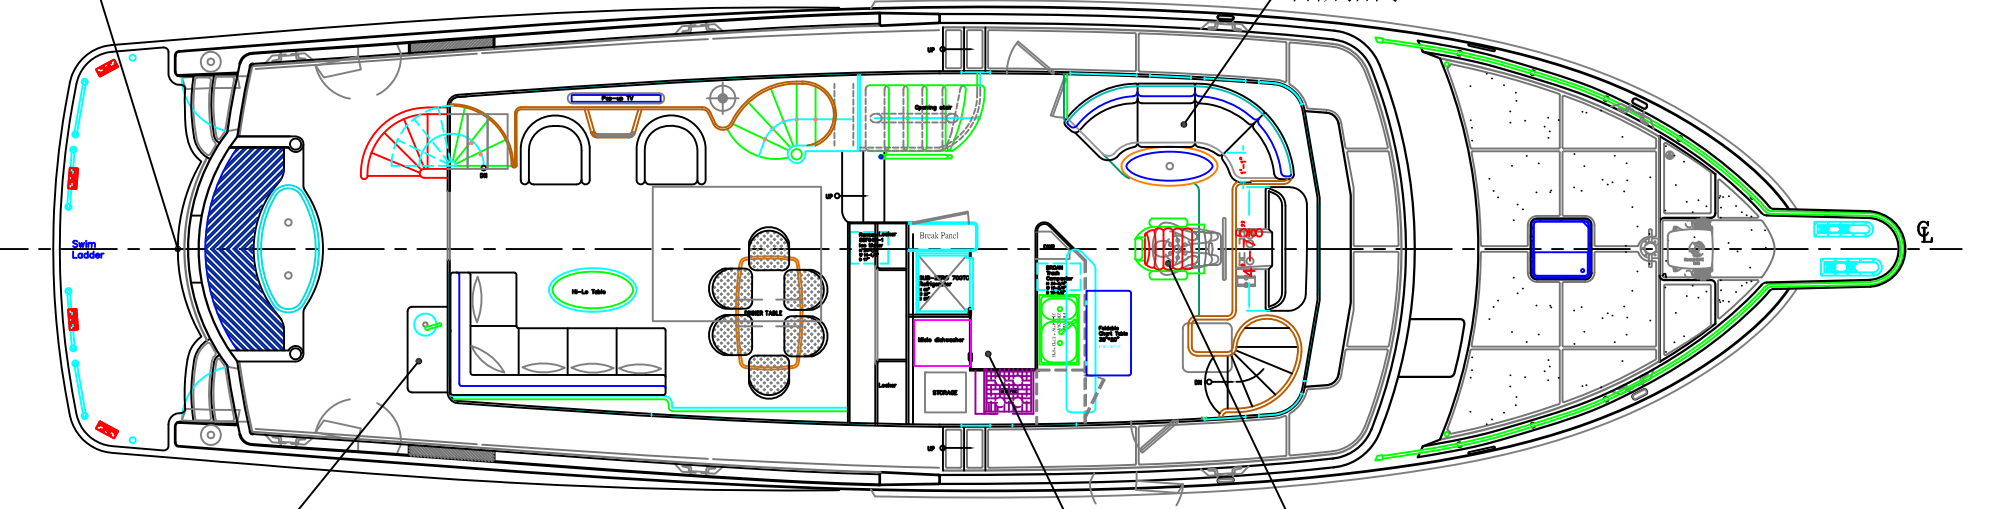


FRP locker w/ sink 后甲板柜附洗手盆

Single Engine: John Deere 526HP @ 2100RPM

Hydraulic Stabilizer
Galley Up

Stidd helm chairs

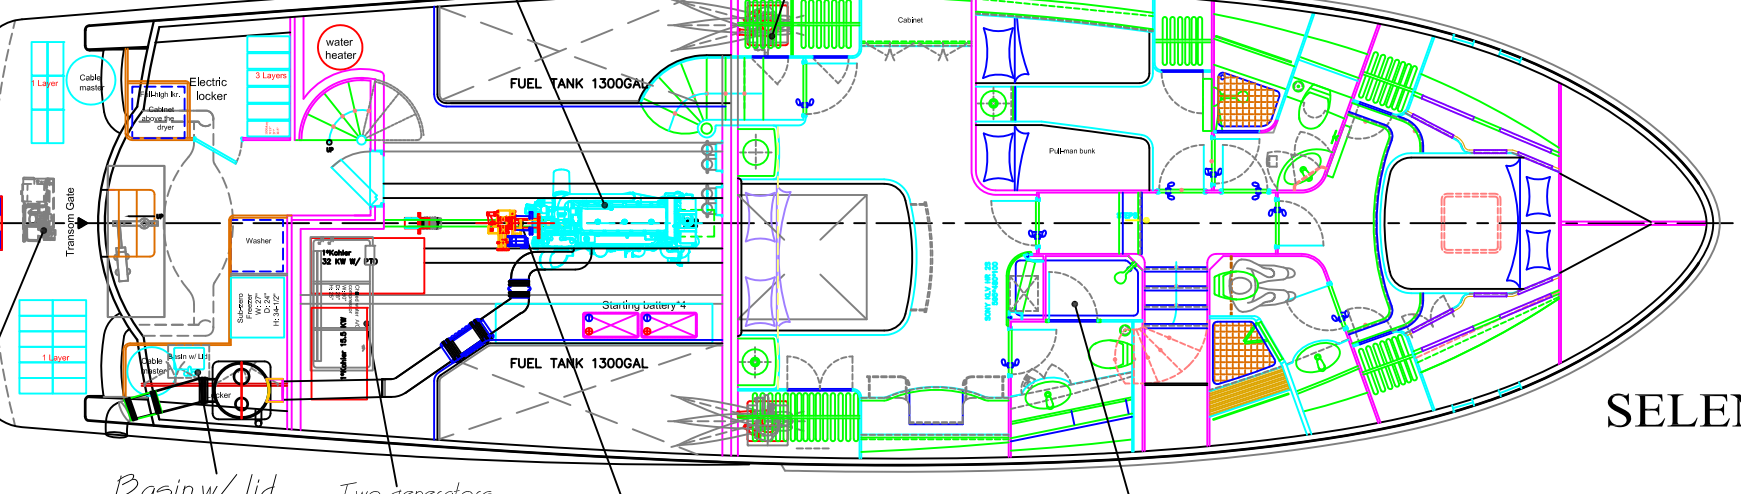

Basin w/ lid
可丽耐洗手盆附盖

Two generators
两台发电机

Keypower get home system
备用系统

Shower tub in the master
主人舱浴盆

0 0.5 1 1.5 2 2.5 3M

14 13 12 11 10 9 8 7 6 5 4 3 2

SELENE 6214